
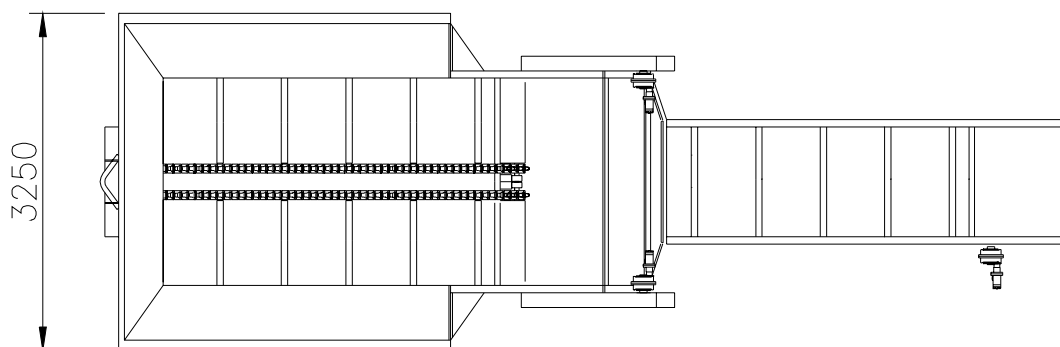


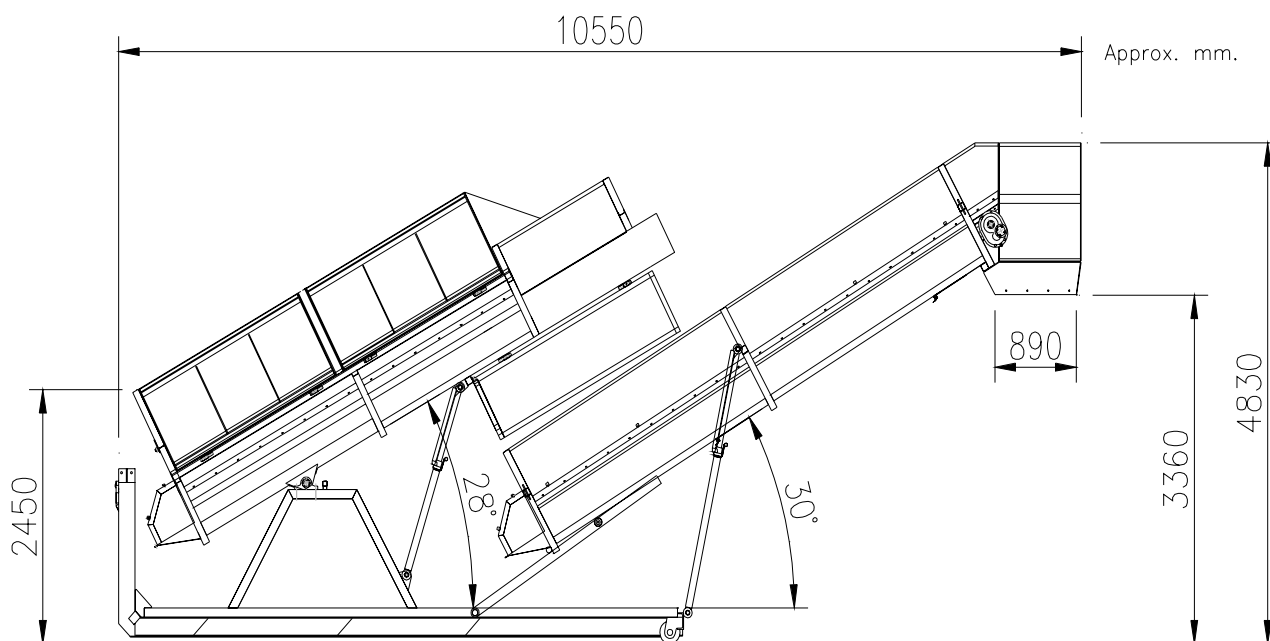

Mobile combination conveyor	204-110
-----------------------------	---------

**Mobile combination
conveyor 204-110**

Type	chain conveyors with pushers	
Roll-on roll-off frame	according to swedish standard	SS 3021
	height, adjustable hook (mm)	1450/1570
	length of roll-on roll-off frame (mm)	6280
Dimensions	maximum height, transport mode (mm)	2700
	maximum length, transport mode (mm)	6925
	maximum width, transport mode (mm)	2600
	distance between pushers (mm)	(distribution conveyor) 710
	distance between pushers (mm)	(feed conveyor) 550
Weight	(kg)	8 300
Drive	electro-hydraulic	
	feed rate nominal, (m/min)	(distribution conveyor) 3,4
	feed rate nominal, (m/min)	(feed conveyor) 20,2
Electrical data	drive voltage	400V 3-phase+0 50Hz ±10%
	installed power (kW)	3
Hydraulics data	number of hydraulic motors, manufacturer, designation	(distribution conveyor) 2 pcs, Char-Lynn, 2000-159-2-1"
	number of hydraulic motors, manufacturer, designation	(feed conveyor) 1 pcs, Char-Lynn, 2000-195-2-1"
	number of hydraulic cylinders, manufacturer	7 pcs, Skillingaryds Mek. / Stacke
	number of gear boxes, manufacturer, designation	(distribution conveyor) 2 pcs, STP, TA 500 15:1
	number of gear boxes, manufacturer, designation	(feed conveyor) 1 pcs, STP, TA 600 4:1
	hydraulic oil type	ISO VG 32
	oil capacity, hydraulic tank (liters)	32
	maximum oil pressure (bar)	150